


# ElSCO™ Roller Guides

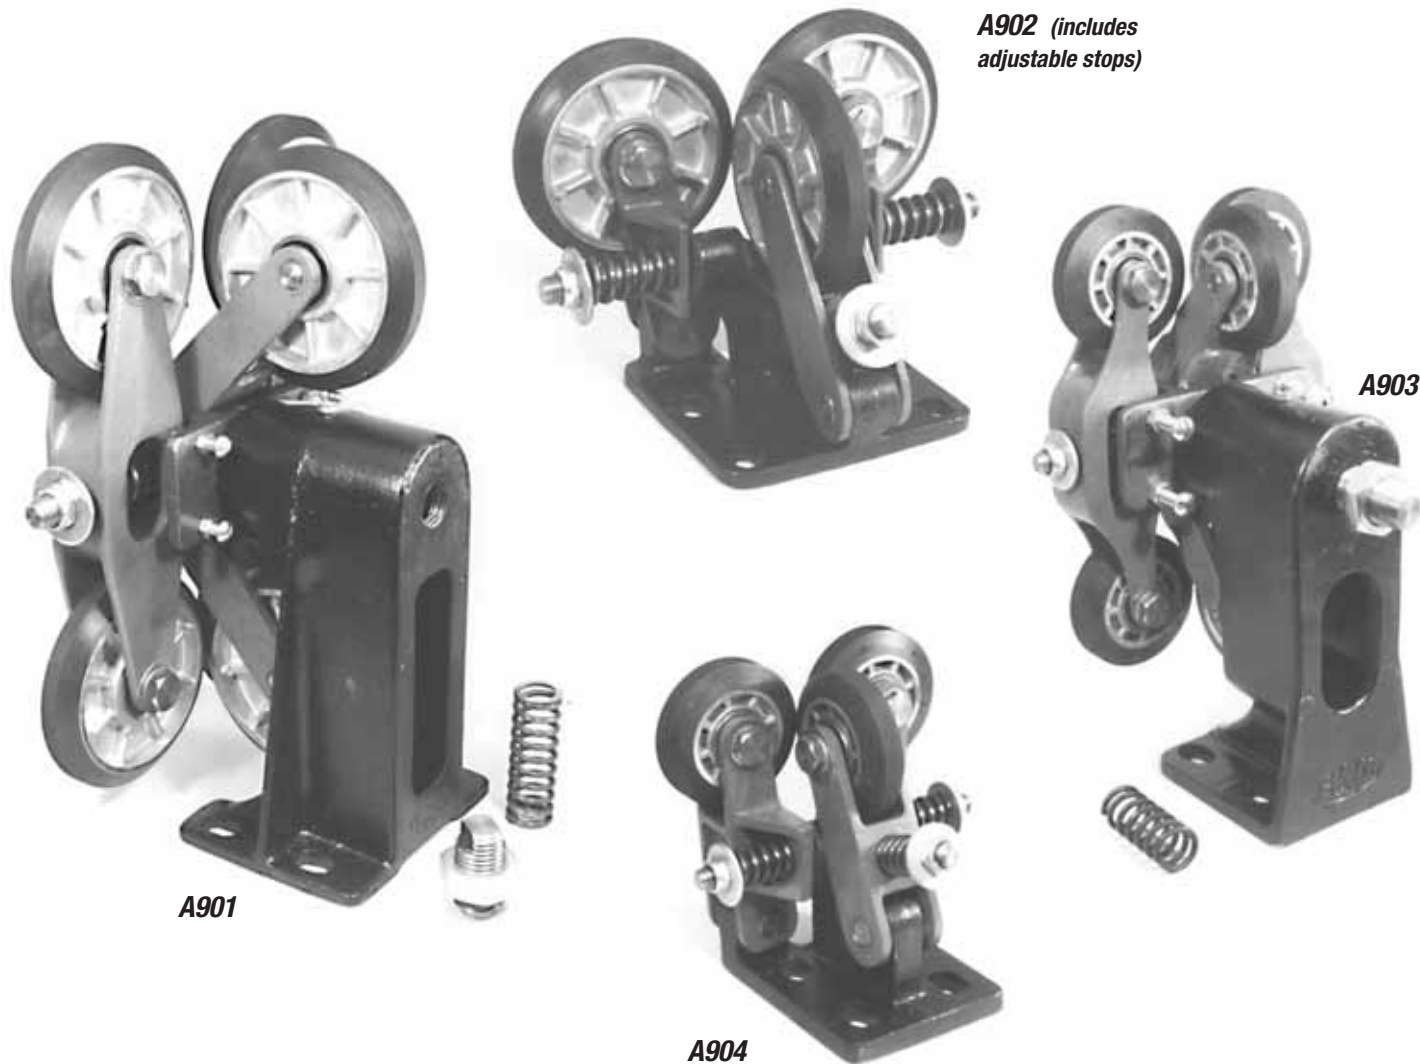

Adams supplies genuine ELSCO roller guides and guide wheels.

**A901** six-wheel guide is recommended for high-speed passenger and heavy-duty freight elevators. Includes adjustable stops.

**A902** for moderate-speed and moderate-capacity elevators. Includes adjustable stops. Sold only in sets of 2.

The **A903** six-wheel model is a smaller version of the A901, designed for

many elevators and counterweights.

**And you'll find our A904 to be ideal** for low-speed/low-load elevators and moderate-speed counterweights. Sold only in sets of 2.

**Wheels on all models** are fitted with Neoprene tires. Increase the load capacity of A901 and A902 by replacing the Neoprene wheels with Adams' own SPx<sup>80</sup> Quiet Poly rollers, sold separately on the next page.

## ROLLER GUIDE ORDERING INFORMATION

Adams part no.	No. of wheels	Wheel diameter	Cab Capacity			Speed		ELSCO part no.
			Passenger	Freight	Counterweight	Passenger/Freight	Counterweight	
<b>A901</b>	6	6"	8000 lbs.	12,000 lbs.**	N/A	1500 ft./min.	N/A	Model A
<b>A902*</b>	3	6"	4500 lbs.	6000 lbs.**	8000 lbs.	700 ft./min.	1400 ft./min.	Model B
<b>A903</b>	6	3 1/4"	2500 lbs.	N/A	8000 lbs.	400 ft./min.	800 ft./min.	Model C
<b>A904*</b>	3	3 1/4"	2000 lbs.	2000 lbs.	4000 lbs.	250 ft./min.	800 ft./min.	Model D

\*Sold only in sets of 2.

\*\*When modified with Adams SPx<sup>80</sup>™ Quiet Poly rollers.