


# Gorman

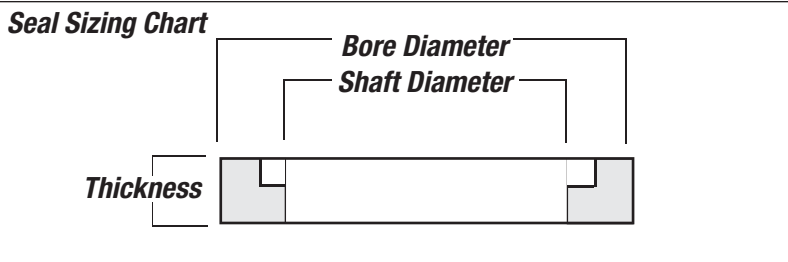

AMCO/WHITE EVANS				
Adams part no.	Piston diameter	Dimensions		
		Shaft Dia.	Bore Dia	Thick
GB03500B6	3 1/2"	4.510"	3.505"	0.750"
GB04000B6	4"	5.000"	4.025"	0.750"
GB04375B6	4 3/8"	5.378"	4.400"	0.750"
GB04500B6	4 1/2"	5.503"	4.525"	0.750"
GB05000B6	5"	6.003"	5.025"	0.750"
GB05375B6	5 3/8"	6.375"	5.400"	0.750"
GB05437B6	5 7/16"	6.437"	5.463"	0.750"
GB05500B6	5 1/2"	6.503"	5.525"	0.750"
GB06000B6	6"	7.003"	6.025"	0.750"
GB06500B6	6 1/2"	7.503"	6.525"	0.750"
GB07500B6	7 1/2"	8.503"	7.525"	1.000"
GB08500B6	8 1/2"	9.503"	8.525"	1.000"
GB09500B6	9 1/2"	10.503"	9.525"	1.000"
GB10625B6	10 5/8"	11.625"	10.655"	1.000"
GB12625B6	12 5/8"	13.630"	12.645"	1.000"

Shaft and bore diameters are accurate to ±0.005".  
**NOTE:** B6-series bearing rings are made to fit only AMCO/White Evans pistons.

ESCO P-6				
Adams part no.	Piston diameter	Dimensions		
		Shaft Dia.	Bore Dia	Thick
GB04000B5	4"	4.375"	4.020"	0.0875"
GB04500B5	4 1/2"	4.875"	4.520"	0.0875"
GB05000B5	5"	5.375"	5.020"	0.0875"
GB05500B5	5 1/2"	5.875"	5.520"	0.0875"
GB06000B5	6"	6.375"	6.020"	0.0875"
GB06500B5	6 1/2"	6.875"	6.520"	0.0875"
GB07000B5	7"	7.375"	7.020"	0.0875"

Shaft and Bore diameters are accurate to ±0.005", Thickness to ±0.015".  
**NOTE:** B5-series bearing rings are made to fit only ESCO P-6 pistons.

CEMCO				
Adams part no.	Piston diameter	Dimensions		
		Shaft Dia.	Bore Dia	Thick
GB03500B8	3 1/2"	4.470"	3.500"	0.875"
GB03750B8	3 3/8"	4.725"	3.775"	0.875"
GB04000B8	4"	4.975"	4.000"	0.875"
GB04375B8	4 3/8"	5.357"	4.400"	0.875"
GB04437B8	4 7/16"	5.431"	4.462"	0.875"
GB04500B8	4 1/2"	5.470"	4.500"	0.875"
GB05000B8	5"	5.975"	5.000"	0.875"
GB05437B8	5 7/16"	6.422"	5.462"	0.875"
GB05500B8	5 1/2"	6.469"	5.504"	0.875"
GB06000B8	6"	6.975"	6.000"	0.875"
GB06500B8	6 1/2"	7.457"	6.508"	0.875"
GB07000B8	7"	7.959"	7.000"	0.875"
GB07500B8	7 1/2"	8.475"	7.505"	0.875"
GB08000B8	8"	8.957"	8.000"	0.875"
GB08500B8	8 1/2"	9.475"	8.505"	0.875"
GB09000B8	9"	9.975"	8.990"	0.875"
GB09500B8	9 1/2"	10.475"	9.500"	0.875"
GB10000B8	10"	10.975"	10.000"	0.875"
GB10500B8	10 1/2"	11.470"	10.500"	0.875"
GB10625B8	10 5/8"	11.620"	10.655"	0.875"
GB12500B8	12 1/2"	13.495"	12.530"	0.875"
GB12625B8	12 5/8"	13.620"	12.655"	0.875"

Shaft and Bore diameters are accurate to within ±0.005"; Thick to ±0.015".  
**NOTE:** B8-series bearing rings are made to fit only CEMCO pistons.

BORE-MAX				
Adams part no.	Piston diameter	Dimensions		
		Shaft Dia.	Bore Dia	Thick
GB04375B25	4 3/8"	5.362"	4.392"	0.750"
GB05000B25	5"	5.987"	5.017"	0.750"

Shaft and Bore diameters are accurate to ±0.003"; Thick to ±0.015".  
**NOTE:** B25-series bearing rings are made to fit only Bore-Max pistons.

GENERAL G-HEAD				
Adams part no.	Piston diameter	Dimensions		
		Shaft Dia.	Bore Dia	Thick
GB03500B21	3 1/2"	4.480"	3.530"	1.062"
GB04000B21	4"	4.985"	4.030"	1.062"
GB04437B21	4 7/16"	5.428"	4.460"	1.062"
GB04500B21	4 1/2"	5.482"	5.562"	1.062"
GB05000B21	5"	5.985"	5.030"	1.062"
GB05437B21	5 7/16"	6.418"	5.460"	1.062"
GB05500B21	5 1/2"	6.485"	5.562"	1.062"
GB06437B21	6 7/16"	7.418"	6.460"	1.062"
GB06500B21	6 1/2"	7.480"	6.526"	1.062"
GB07500B21	7 1/2"	8.480"	7.523"	1.062"

Shaft and Bore diameters are accurate to ±0.005", Thickness to ±0.015".  
**NOTE:** B21-series bearing rings are made to fit only General G-Head pistons.